


NJM2902

The NJM2902 consists of four independent high-gain operational amplifiers that are designed for single-supply operation. Operation from split power supplies is also possible and the low power supply drain is independent of the magnitude of the power supply voltage.


Used with a dual supply the circuit will operate over a wide range of supply voltages. However, a large amount of crossover distortion may occur with loads to ground. An external current-sinking resistor to $-V_S$ will reduce crossover distortion. There is no crossover distortion problem in single-supply operation if the load is direct-coupled to ground.

■ Package Outline

■ Absolute Maximum Ratings (Ta=25°C)			
Supply Voltage	V ⁺ (V ⁺ /V ⁻)	32V (or ±16V)	
Differential Input Voltage	V _{ID}	32V	
Input Voltage	V _I	-0.3~+32V	
Power Dissipation	P _D (N-Type)	570mW	
	(M, V-Type)	300mW	
Operating Temperature Range	T _{opr}	-40~+85°C	
Storage Temperature Range	T _{stg}	-50~+125°C	



NJM2902N



NJM2902M




NJM2902V


■ Electrical Characteristics (Ta=25°C, V⁺=5V)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Offset Voltage	V _{IO}	R _S =0Ω	—	2	10	mV
Input Offset Current	I _{IO}	I _{IN} ⁺ - I _{IN} ⁻	—	5	50	nA
Input Bias Current	I _B	I _{IN} ⁺ or I _{IN} ⁻	—	20	500	nA
Large Signal Voltage Gain	A _V	R _L ≥ 2kΩ	—	100	—	V/mV
Maximum Output Voltage Swing	V _{OPP}	R _L =2kΩ	3.5	—	—	V _{PP}
Input Common Mode Voltage Range	V _{ICM}		0~3.5	—	—	V
Common Mode Rejection Ratio	CMR		—	85	—	dB
Supply Voltage Rejection Ratio	SVR		—	100	—	dB
Output Source Current	I _{SOURCE}	V _{IN} ⁺ = 1V, V _{IN} ⁻ = 0V	20	40	—	mA
Output Sink Current	I _{SINK}	V _{IN} ⁺ = 0V, V _{IN} ⁻ = 1V	8	20	—	mA
Channel Separation	CS	f=1k~20kHz, Input Referred	—	120	—	dB
Supply Current	I _{CC}	R _L =∞	—	1	2	mA
Slew Rate	SR		—	0.5	—	V/μs
Gain Bandwidth Product	GB		—	0.5	—	MHz

■ Equivalent Circuit (1/4 Shown)

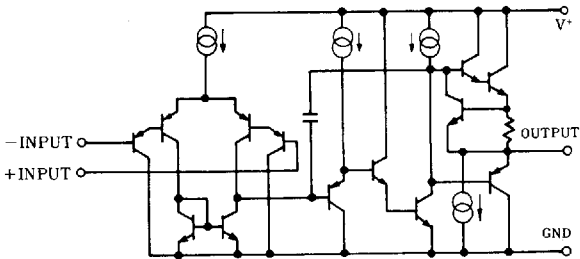


■ Connection Diagram




PIN FUNCTION			
1 .A OUTPUT	8 .C OUTPUT		
2 .A -INPUT	9 .C -INPUT		
3 .A +INPUT	10 .C +INPUT		
4 .V ⁺	11 .GND		
5 .B +INPUT	12 .D +INPUT		
6 .B -INPUT	13 .D -INPUT		
7 .B OUTPUT	14 .D OUTPUT		

■ Typical Characteristics


Maximum Output Voltage Swing vs. Load Resistance

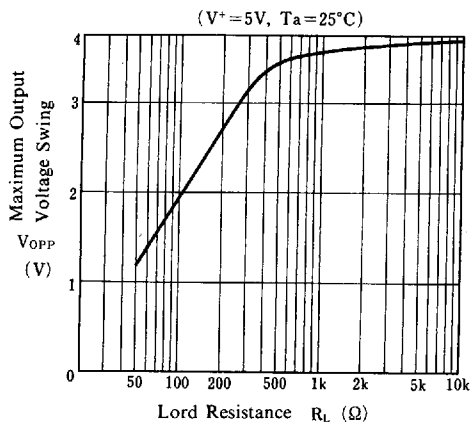


Voltage Gain, Phase vs. Frequency

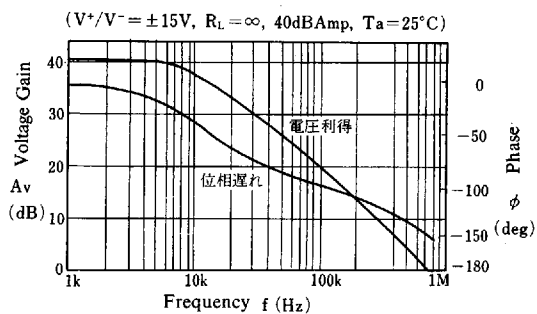


Supply Current vs. Supply Voltage

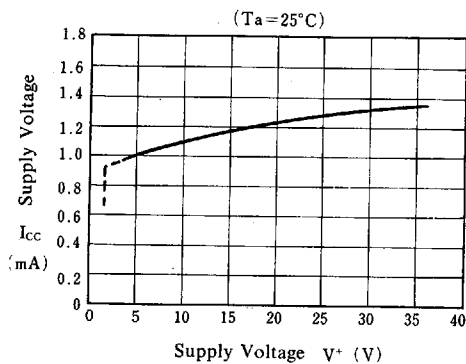


Voltage Gain vs. Supply Voltage

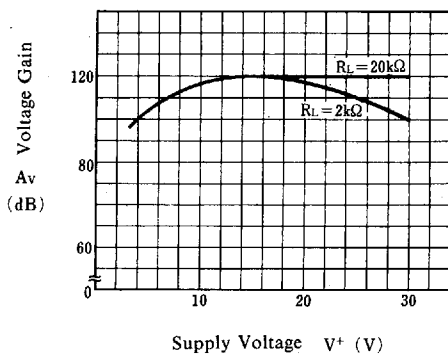

Input Offset Voltage vs. Temperature

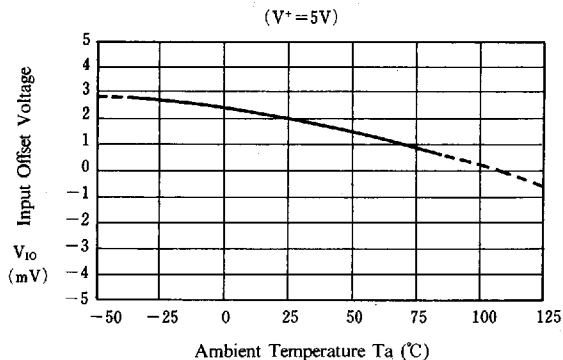


Maximum Output Voltage vs. Supply Voltage

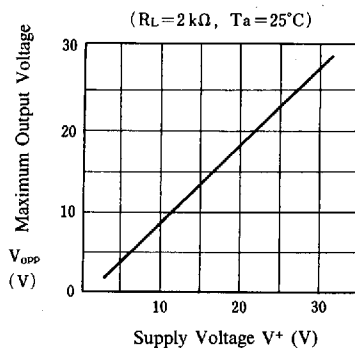

■ Typical Characteristics


Input Offset Voltage vs. Temperature

($V^+ = 5\text{ V}$)

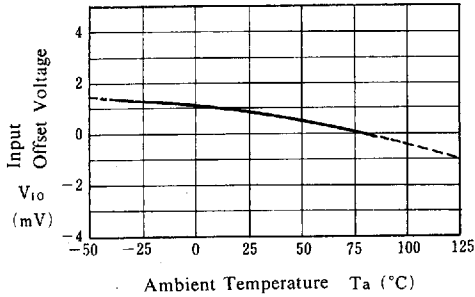


Input Bias Current vs. Temperature

($V^- = 5\text{ V}$)

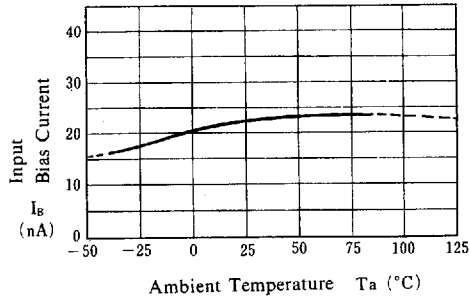


Supply Current vs. Temperature

($V^+ = 5\text{ V}$)

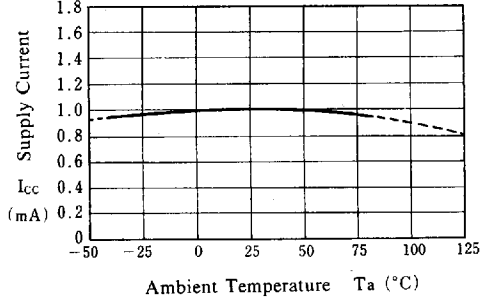


Maximum Output Voltage Swing vs. Temperature

($V^+/V^- = \pm 2.5\text{ V}$, $R_L = 2\text{ k}\Omega$)

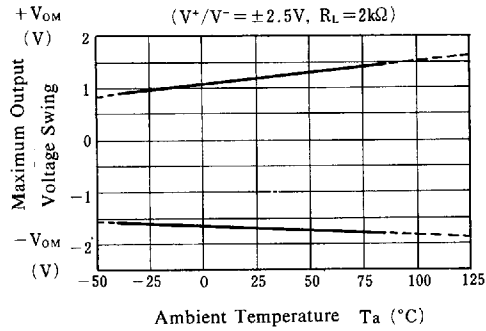





Output Sink Current vs. Temperature

($V^+ = 5\text{ V}$)

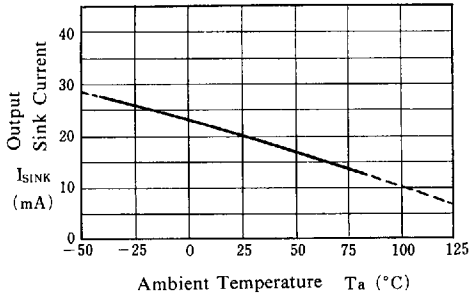


4

■ Typical Characteristics

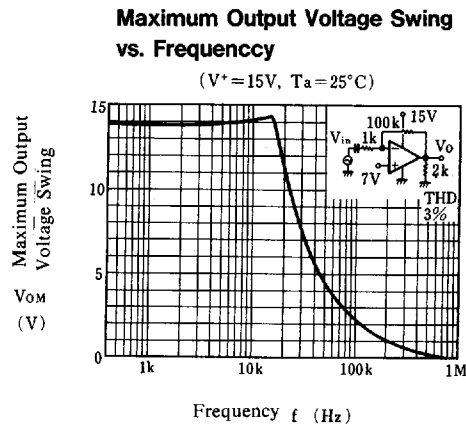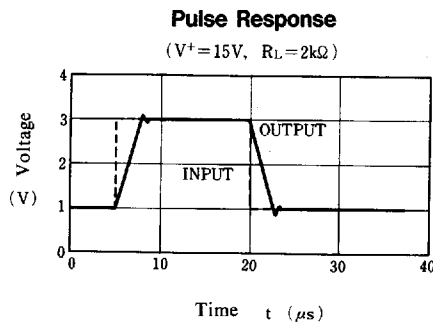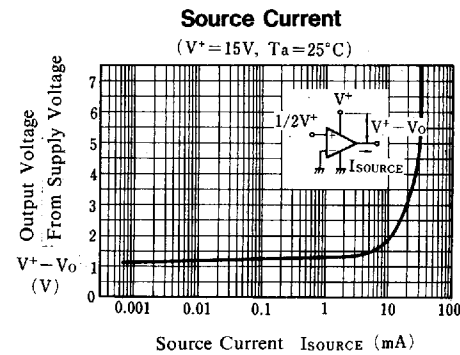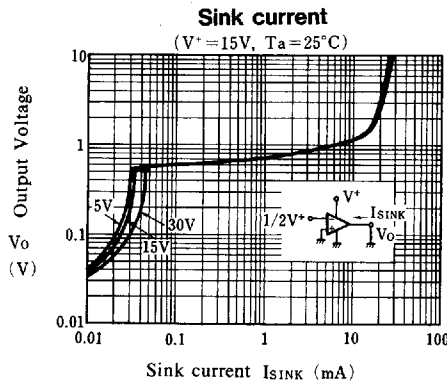

■ Application

Improvement of Cross-over Distortion
Equivalent circuit at the output stage



NJM2902, in its static state (No in and output condition) when design, Q_U being biased by constant current (break down beam) yet, Q_L stays OFF.

While using with both power source mode, the cross-over distortion might occur instantly when Q_L ON.

There might be cases when application for amplifier of audio signals, not only distortion but also the apparent frequency bandwidth being narrowed remarkably.

It is advisable especially when using both power source mode, constantly to use with higher current on Q_U than the load current (including feedback current), and then connect the pull-down resistor R_P at the part between output and GND pins.

