


IGBT MODULE (N series)

■ Outline Drawing

■ Features

- Square RBSOA
- Low Saturation Voltage
- Overcurrent Limiting Function (~3 Times Rated Current)

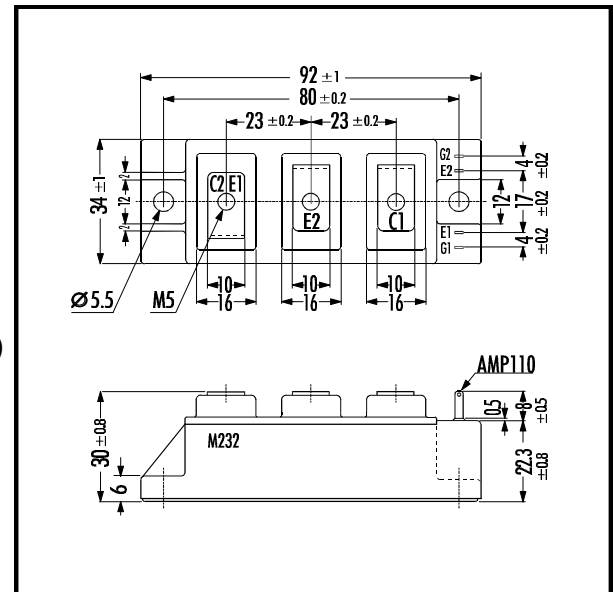


■ Maximum Ratings and Characteristics

• Absolute Maximum Ratings (T_c=25°C)

Items	Symbols	Ratings	Units
Collector-Emmitter Voltage	V _{CES}	600	V
Gate -Emmitter Voltage	V _{GES}	± 20	V
Collector Current	Continuous	I _C	150
	1ms	I _{C PULSE}	300
	Continuous	-I _C	150
	1ms	-I _{C PULSE}	300
Max. Power Dissipation	P _C	600	W
Operating Temperature	T _j	+150	°C
Storage Temperature	T _{stg}	-40 ~ +125	°C
Isolation Voltage	A.C. 1min.	V _{is}	2500
Screw Torque	Mounting *1	3.5	Nm
	Terminals *1	3.5	

Note: *1:Recommendable Value; 2.5 ~ 3.5 Nm (M5)

■ Equivalent Circuit

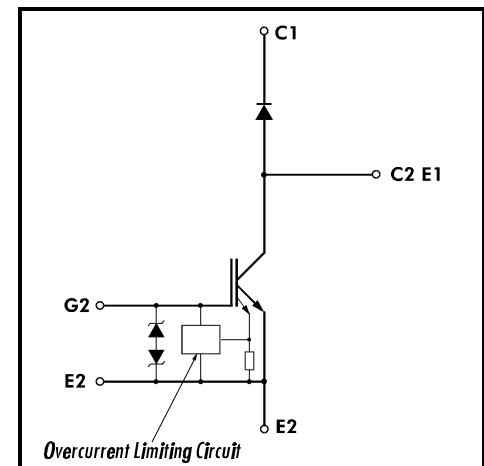

• Electrical Characteristics (at T_j=25°C)


Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	I _{CES}	V _{GE} =0V V _{CE} =600V			1.0	mA
Gate-Emmitter Leakage Current	I _{GES}	V _{CE} =0V V _{GE} =± 20V			15	μA
Gate-Emmitter Threshold Voltage	V _{GE(th)}	V _{GE} =20V I _C =150mA	4.5		7.5	V
Collector-Emmitter Saturation Voltage	V _{CE(sat)}	V _{GE} =15V I _C =150A			2.8	V
Input capacitance	C _{ies}	V _{GE} =0V		9900		pF
Output capacitance	C _{oes}	V _{CE} =10V		2200		
Reverse Transfer capacitance	C _{res}	f=1MHz		1000		
Turn-on Time	t _{ON}	V _{CC} =300V		0.6	1.2	μs
Turn-off Time	t _r	I _C =150A		0.2	0.6	
	t _{OFF}	V _{GE} =± 15V		0.6	1.0	
	t _f	R _G =16Ω		0.2	0.35	
Diode Forward On-Voltage	V _F	I _F =150A V _{GE} =0V			3.0	V
Reverse Recovery Time	t _{rr}	I _F =150A			300	ns
Reverse Current	I _{RRM}	V _R =600V			1.0	mA

• Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	R _{th(j-c)}	IGBT			0.21	°C/W
	R _{th(j-e)}	Diode			0.47	
	R _{th(c-f)}	With Thermal Compound		0.05		


Collector current vs. Collector-Emittor voltage

$T_J=25^{\circ}\text{C}$

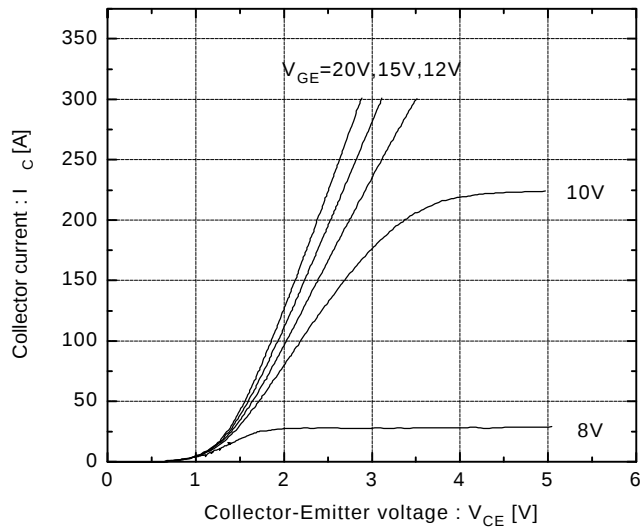


Collector current vs. Collector-Emittor voltage

$T_J=125^{\circ}\text{C}$

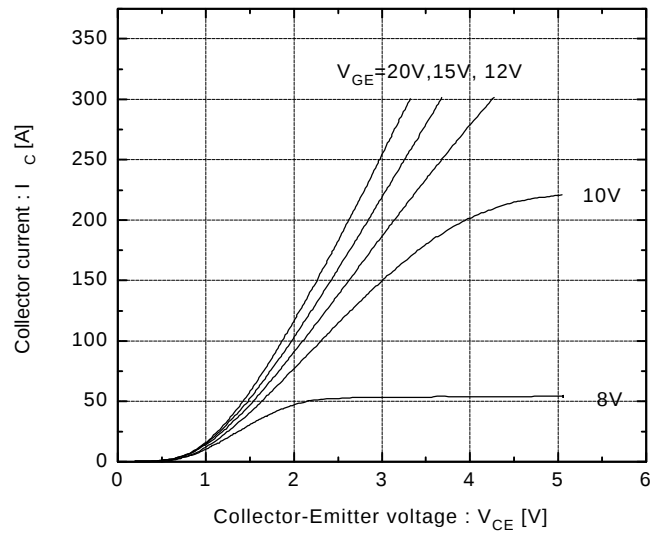


Collector-Emittor vs. Gate-Emittor voltage

$T_J=25^{\circ}\text{C}$

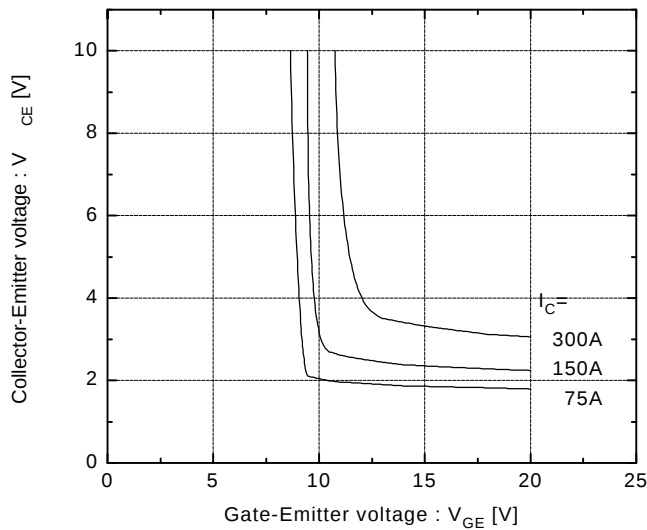


Collector-Emittor vs. Gate-Emittor voltage


$T_J=125^{\circ}\text{C}$

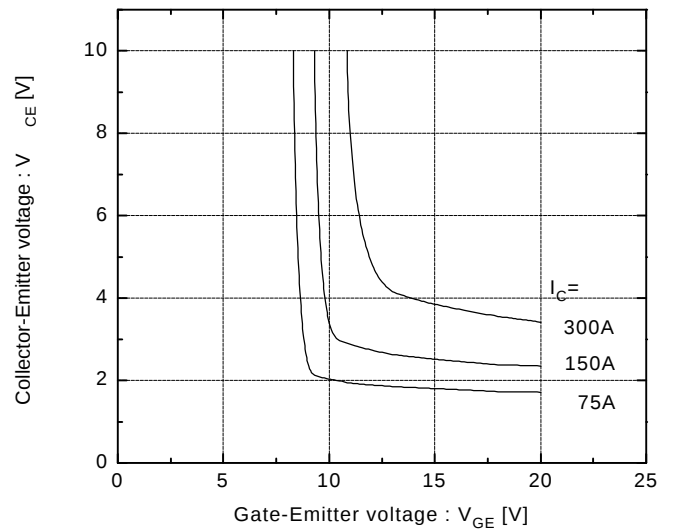

Switching time vs. Collector current
 $V_{CC}=300V, R_G=16\Omega, V_{GE}=\pm 15V, T_J=25^{\circ}\text{C}$

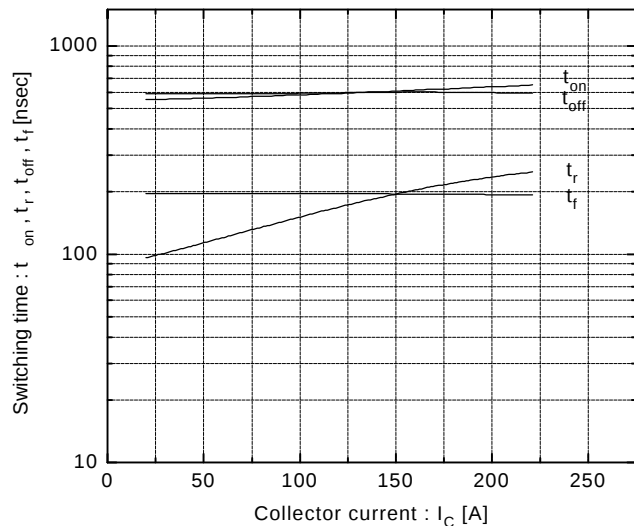


Switching time vs. Collector current
 $V_{CC}=300V, R_G=16\Omega, V_{GE}=\pm 15V, T_J=125^{\circ}\text{C}$

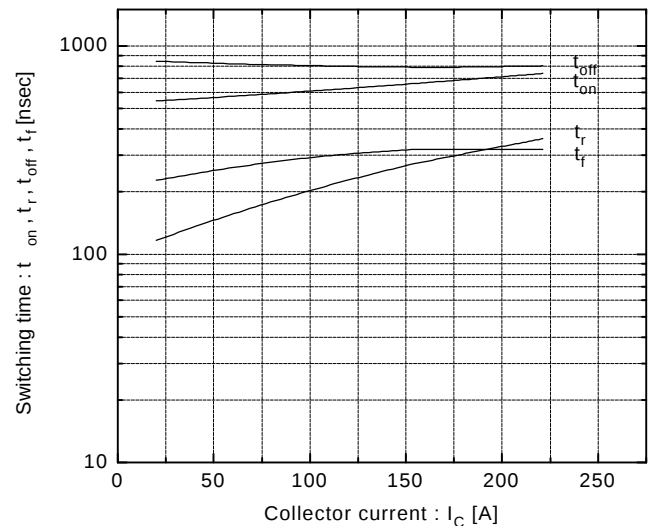


Switching time vs. R_G

$V_{CC}=300V$, $I_C=150A$, $V_{GE}=\pm 15V$, $T_J=25^\circ C$

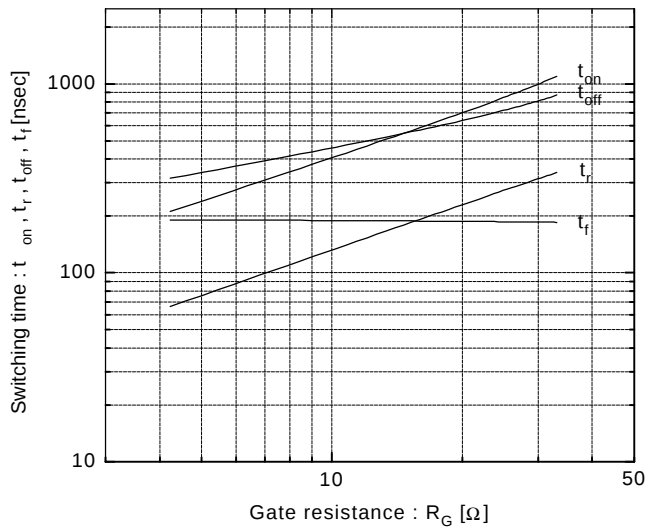


Dynamic input characteristics

$T_J=25^\circ C$

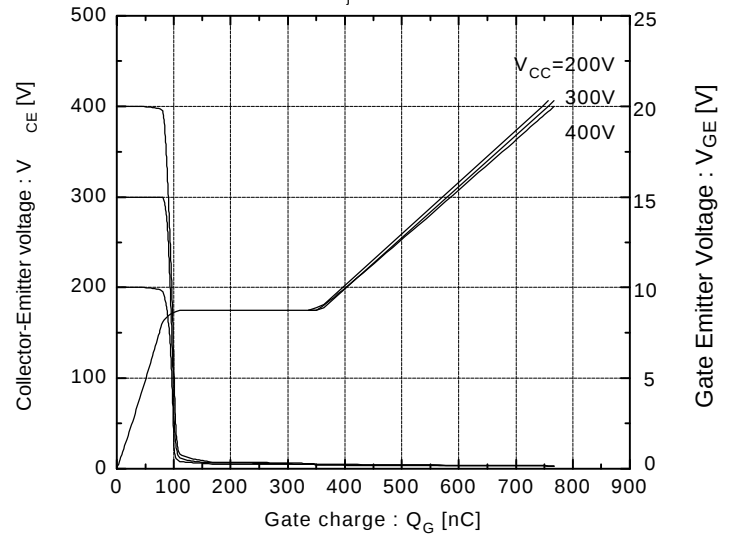


Forward current vs. Forward voltage

$V_{GE}=0V$

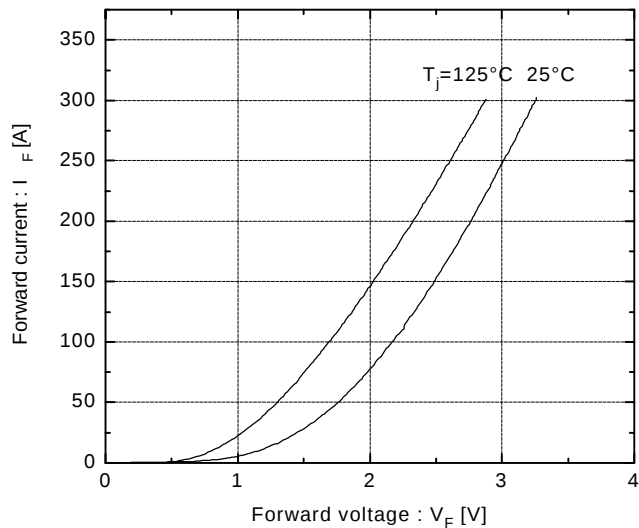


Reverse recovery characteristics

t_{rr} , I_{rr} vs. I_F

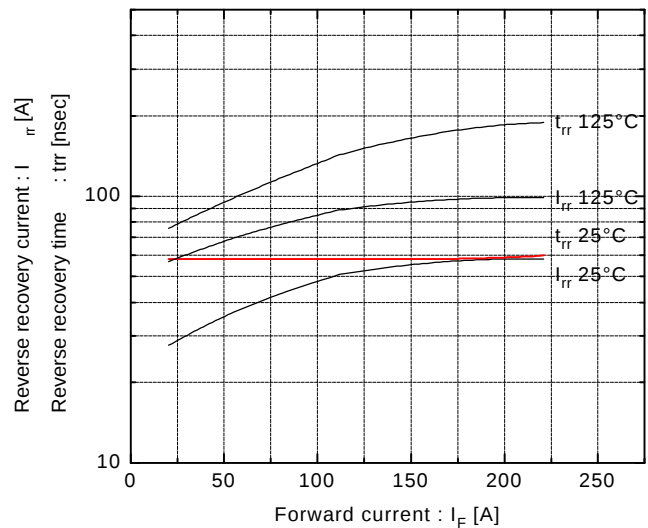


Transient thermal resistance

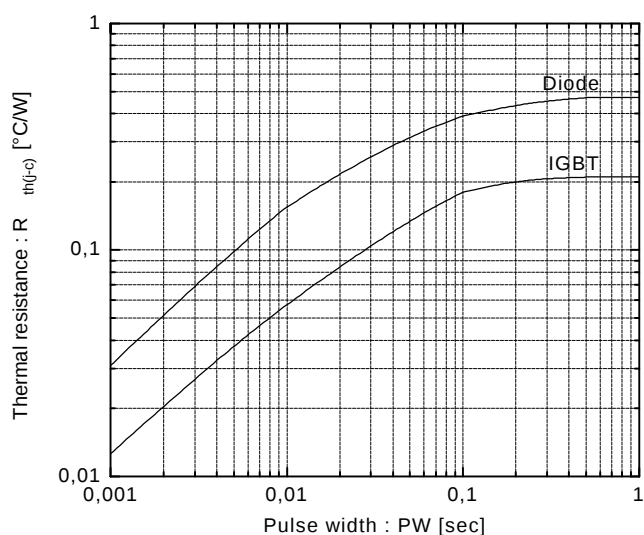


Reversed biased safe operating area


$+V_{GE}=15V$, $-V_{GE}\leq 15V$, $T_J\leq 125^\circ C$, $R_G\geq 16\Omega$

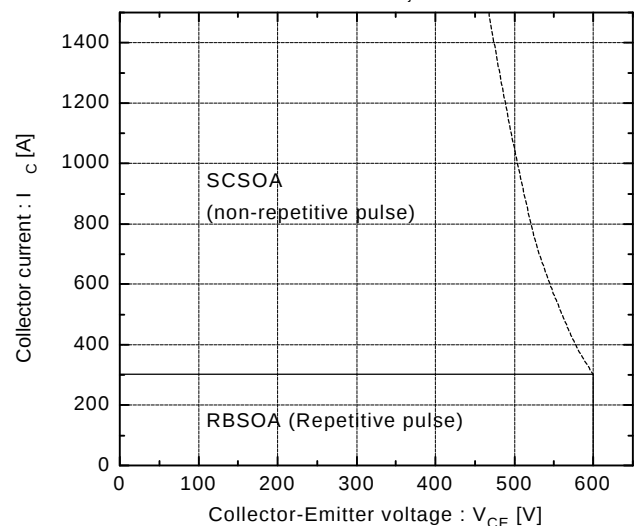

Switching loss vs. Collector current
 $V_{CC}=300V$, $R_G=16\Omega$, $V_{GE}=\pm 15V$

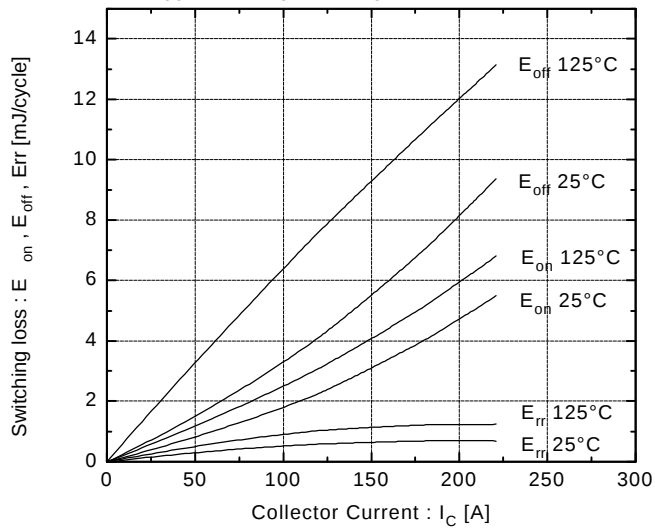

Capacitance vs. Collector-Emitter voltage
 $T_J=25^\circ C$

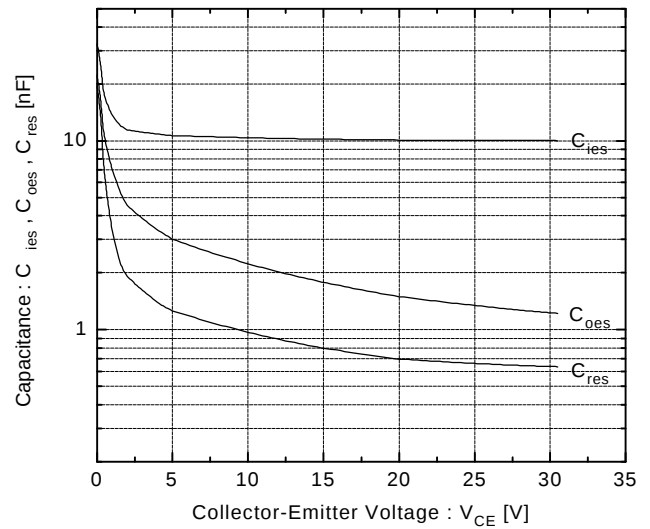

Fuji Electric GmbH

Lyoner Straße 26

D-60528 Frankfurt/M

Tel.: 069 - 66 90 29 - 0

Fax.: 069 - 66 90 29 - 56

Fuji Electric (UK) Ltd.

Commonwealth House
 2 Chalkhill Road Hammersmith

London W6 8DW, UK

Tel.: 0181 - 233 11 30

Fax.: 0181 - 233 11 60